



Swansea University
Prifysgol Abertawe



Cronfa - Swansea University Open Access Repository

This is an author produced version of a paper published in:
International Journal of Control, Automation and Systems

Cronfa URL for this paper:

<http://cronfa.swan.ac.uk/Record/cronfa34729>

Paper:

Yang, C., Teng, T., Xu, B., Li, Z., Na, J. & Su, C. (2017). Global adaptive tracking control of robot manipulators using neural networks with finite-time learning convergence. *International Journal of Control, Automation and Systems*
<http://dx.doi.org/10.1007/s12555-016-0515-7>

This item is brought to you by Swansea University. Any person downloading material is agreeing to abide by the terms of the repository licence. Copies of full text items may be used or reproduced in any format or medium, without prior permission for personal research or study, educational or non-commercial purposes only. The copyright for any work remains with the original author unless otherwise specified. The full-text must not be sold in any format or medium without the formal permission of the copyright holder.

Permission for multiple reproductions should be obtained from the original author.

Authors are personally responsible for adhering to copyright and publisher restrictions when uploading content to the repository.

<http://www.swansea.ac.uk/iss/researchsupport/cronfa-support/>

Global Adaptive Tracking Control of Robot Manipulators Using Neural Networks with Finite-time Learning Convergence

Chenguang Yang*, Tao Teng, Bin Xu, Zhijun Li, Jing Na, and Chun-Yi Su

Abstract: In this paper, the global adaptive neural control with finite-time (FT) convergence learning performance for a general class of nonlinear robot manipulators has been investigated. The scheme proposed in this paper offers a subtle blend of neural controller with robust controller, which palliates the limitation of neural approximation region to ensure globally uniformly ultimately bounded (GUUB) stability by integrating a switching mechanism. Moreover, the proposed scheme guarantees the estimated neural weights converging to optimal values in finite time by embedding an adaptive learning algorithm driven by the estimated weights error. The optimal weights obtained through the learning process of the neural networks (NNs) will be reused next time for repeated tasks, and can thus reduce computational load, improve transient performance and enhance robustness. The simulation studies have been carried out to demonstrate the superior performance of the controller in comparison to the conventional methods.

Keywords: Finite-time learning convergence, globally uniformly ultimate boundedness, neural networks, robot manipulators.

1. INTRODUCTION

In the last decades, robots have been widely used in various fields. With the rapid development and extensive applications of robotic technology, the requirements for fine working and flexible control are becoming increasingly demanding under different environments. However, due to the increasing complexity of dynamics model of robots, exact knowledge of robot dynamics is unavailable in actual engineering application. In addition, the working condition could be extremely uncertain, such as variation of the external environment and change of payload, etc. Thus, a crucial problem in robot control is to overcome the uncertainties mentioned above.

In practical industrial applications, there are many ways to overcome the uncertainties of the systems [1–5]. NNs [6] play a significant role to enhance robot's intelligence [7–14], by improvement of the performance of the control systems in uncertain environments. With the universal approximation ability, the NNs can be used as an ef-

fective tool in approximation based control of highly uncertain, nonlinear and complex systems. The approximation ability of the NNs lies on the foundation of the Stone-Weierstrass theorem [15–18], which states that any real continuous function on a compact set is able to be uniformly approximated to an arbitrary degree of accuracy.

NNs can be embedded into control framework in a variety of means [19–23], and remarkable achievements have been made. However, it is essential to note that the NNs approximation ability is valid merely in a compact domain. The conventional NN-based robot manipulators control could merely guarantee the semi-global uniformly ultimately bounded (SGUUB) stability. In this sense, it is ideal to grow a global NNs controller for robot manipulators [24]. In [25], the global NNs controller was only designed for strict-feedback systems in the case of existing unknown dynamics. To palliate the difficulty in prior estimation of the domain for the employment of the NNs, a robust adaptive NNs controller was addressed in [26] to achieve global uniformly ultimately bounded (GUUB)

Manuscript received August 15, 2016; revised November 1, 2016; accepted November 11, 2016. Recommended by Associate Editor Choon Ki Ahn under the direction of Editor Euntai Kim. This work was partially supported by National Nature Science Foundation (NSFC) under Grant 61473120, 61622308, 61573174, Guangdong Provincial Natural Science Foundation 2014A030313266 and International Science and Technology Collaboration Grant 2015A050502017, Science and Technology Planning Project of Guangzhou 201607010006, State Key Laboratory of Robotics and System (HIT) Grant SKLRS-2017-KF-13, the Fundamental Research Funds for the Central Universities, and Fundamental Research Funds of Shenzhen Science and Technology Project under Grant JCYJ20160229172341417.

Chenguang Yang, Tao Teng, Zhijun Li, and Chun-Yi Su are with the Key Lab of Autonomous Systems and Networked Control, Ministry of Education, South China University of Technology, Guangzhou, China (e-mails: cyang@ieee.org, tao.teng_1994@qq.com, zjli@ieee.org, cysu@algor.concordia.ca). Chenguang Yang is also with Zienkiewicz Centre for Computational Engineering, Swansea University, SA1 8EN, UK. Chun-Yi Su is on leave from Concordia University. Bin Xu is with the School of Automation, Northwestern Polytechnical University, Xian, China (e-mail: binxu@nwpu.edu.cn). Jing Na is with Faculty of Mechanical & Electrical Engineering, Kunming University of Science & Technology, Kunming, China (e-mail: najing25@163.com).

* Corresponding author.

tracking.

It should also be noted that the conventional adaptiveNNs controls only focus on control performance rather than neural learning performance. However, with conventional adaptive laws (e.g. gradient method, e-modification and σ -modification), it is not possible to guarantee that the learned neural weights converge to the optimal values. Moreover, the speed of the learning convergence cannot be specified by the designer. As a matter of fact, the estimation of NN weights usually do not converge to their optimal values. Therefore, neural learning has to be carried out each again next time even if for a repeated task.

In order to associate with conventional learning rate, the FT adaptive learning algorithm is employed to enhance neural learning performance. In [27, 28], the parameter estimation error was obtained by introducing a set of auxiliary filtered variables in a novel way. Therefore, adaptive laws established by the estimation error were presented to achieve the FT convergence. It is remarkable that the FT adaptive learning algorithm can also ensure that the estimated weights converge to optimal values in finite time. The optimal weights obtained through learning process of NNs could therefore be reused next time to repeat the same control task. In this way, the FT adaptive learning algorithm reduces computational load and enhances transient performance for a repeated control task. Consequently, the FT adaptive learning algorithm is of great importance in practical applications of NNs. Inspired by the aforementioned works, in this paper we will develop a global adaptive neural control approach using the NNs with the FT learning convergence, aiming at a general class of nonlinear robot manipulators with unknown dynamics. Based on the learning capability, RBF NNs [29–31] are employed to learn the unknown robot manipulators dynamics. To characterize the neural learning performance, the FT adaptive learning algorithm is presented to enhance neural learning performance. Moreover, a global adaptive neural control scheme is proposed to guarantee not only the global uniformly ultimately boundedness (GUUB) of all the signals in the closed-loop system, but also the neural learning performance such that the estimated neural weights converge to their optimal values in finite time. Consequently, the NNs could simply re-use the learned weights' values for a repeated task next time instead of re-learning them. Thus transient performance and robustness could be improved by skipping the neural learning process.

The remainder of this paper is outlined as follows: mathematical model of a robot manipulator is characterized in Section 2. Section 3 briefly introduces the concept and structure of the radial basis function neural networks (RBF NNs), as well as some functions and key lemmas which are crucial for the controller design. The global adaptive neural controller enhanced by FT learning convergence is designed in Section 4. In Section 5, the simu-

lation results validate the approach we suggest is credible. Finally, Section 6 summarizes up the previous design.

2. PROBLEM FORMULATION

2.1. System description

The dynamics equation of an n -link robot manipulator can be described as follows:

$$M(q)\ddot{q} + C(q, \dot{q})\dot{q} + G(q) = \tau, \quad (1)$$

where $q = [q_1, \dots, q_n]^T \in \mathbb{R}^n$, $\dot{q} = [\dot{q}_1, \dots, \dot{q}_n]^T \in \mathbb{R}^n$ and $\ddot{q} = [\ddot{q}_1, \dots, \ddot{q}_n]^T \in \mathbb{R}^n$ represent the robot joint position vector, joint velocity vector and joint acceleration vector, respectively. $M(q) \in \mathbb{R}^{n \times n}$, $V(q, \dot{q}) \in \mathbb{R}^{n \times n}$, and $G(q) \in \mathbb{R}^n$ are the inertia matrix, Coriolis/centripetal torque matrix and gravity vector, respectively. According to [32], the following properties hold for the robotic system (1):

Property 1: The matrix $M(q) \in \mathbb{R}^{n \times n}$ is symmetric positive-definite.

Property 2: The matrix $\dot{M}(q) - 2C(q, \dot{q})$ is skew-symmetric, i.e., $z^T (\dot{M} - 2C)z = 0$, $\forall z \in \mathbb{R}^n$.

Property 3: The matrices $M(q)$, $C(q, \dot{q})$ and $G(q)$ are all bounded.

2.2. System transformation

Define $x_{1i} = q_i$, $i = 1, \dots, n$, $x_1 = [x_{11}, \dots, x_{1n}]^T \in \mathbb{R}^n$, and $x_{2i} = \dot{q}_i$, $i = 1, \dots, n$, $x_2 = [x_{21}, \dots, x_{2n}]^T \in \mathbb{R}^n$. An n -link robot manipulator (1) is a multiple-input-multiple-output (MIMO) vector functions system which can be transformed to the following form:

$$\begin{aligned} \dot{x}_1 &= x_2, \\ M\dot{x}_2 &= -(Cx_2 + G) + \tau, \\ y &= x_1, \end{aligned} \quad (2)$$

where $y = x_1$ is the output of the robot manipulator system.

3. PRELIMINARIES

3.1. RBF neural networks

In this paper, the RBF NNs are employed as a universal approximator to emulate any real continuous function $f : \mathbb{R}^M \rightarrow \mathbb{R}$ with the following form:

$$f(X_{in}) = \hat{f}(X_{in}, W^*) + \varepsilon(X_{in}), \quad \forall X_{in} \in \Omega_{X_{in}}, \quad (3)$$

where $\hat{f}(X_{in}, \hat{W}) = \hat{W}^T S(X_{in})$, with the input vector $X_{in} \in \Omega_{X_{in}} \subset \mathbb{R}^M$, the NNs output $\hat{f} \in \mathbb{R}$ is the estimation of f , $\hat{W} = [\hat{w}_1, \dots, \hat{w}_N]^T \in \mathbb{R}^N$ is the weight parameter vector, and N is the number of NNs nodes. W^* is optimal NNs weights, According to [29], W^* is defined as:

$$W^* = \arg \min_{(W)} \left[\sup_{X_{in} \in \Omega_{X_{in}}} |f(X_{in}) - \hat{f}(X_{in}, \hat{W})| \right], \quad (4)$$

and $\varepsilon(X_{in})$ is the NNs approximation error, which is uniformly bounded by $|\varepsilon(X_{in})| \leq \varepsilon^*, \forall X_{in} \in \Omega_{X_{in}}$. $S(X_{in}) = [s_1(X_{in}), \dots, s_N(X_{in})]^T$ is a nonlinear vector function of the inputs, the components of which have the following form:

$$s_i(X_{in}) = \exp \left[-\frac{(X_{in} - \xi_i)^T (X_{in} - \xi_i)}{\vartheta^2} \right], \quad i = 1, \dots, N, \quad (5)$$

where $\xi_i = [\xi_{i1}, \xi_{i2}, \dots, \xi_{iM}]^T \in R^M$ represents the center of the i th basis function and ϑ represents the variance.

Assumption 1: The optimal weight W^* is bounded as $\|W^*\| \leq W_m$ on the compact Ω_{X_m} .

Assumption 2: The reference signals q_d and their derivatives \dot{q}_d are smooth and bounded functions.

3.2. Partial PE condition

In adaptive systems, the persistent excitation (PE) condition is of great significance, which has been proven that, the RBF NNs can achieve accurate approximation of closed-loop system dynamics in a neighborhood of a specific periodic trajectory with the partial PE condition [29], when tracking a reference periodic-like trajectory.

Definition 1 [27]: A vector or matrix $\Psi(t)$ is called persistently excited if there exist $T > 0, \zeta > 0$, such that

$$\int_t^{t+T} \Psi^T(\tau) \Psi(\tau) d\tau \geq \zeta I, \forall t \geq 0. \quad (6)$$

3.3. Useful functions and key lemmas

Lemma 1 [25]: The following inequality holds for any $\omega_0 > 0$ and $\eta \in R$:

$$0 \leq |\eta| - \eta \tanh \left(\frac{\eta}{\omega_0} \right) \leq \kappa \omega_0, \quad (7)$$

where κ is a constant satisfying $\kappa = e^{-(\kappa+1)}$, i.e., $\kappa = 0.2785$.

Lemma 2 [27]: For a continuous system $\dot{x} = f(x, t)$, $f(0, t) = 0, x \in R^n$, there is a continuously differentiable positive-definite function $V(x, t)$ and real numbers $\alpha_1 > 0, 0 < \alpha_2 < 1$, such that when $\dot{V}(x, t) \leq -\alpha_1 V^{\alpha_2}(x, t)$ holds, then $V(x, t)$ converges to zero in finite time with the settling time $T \leq \left(\frac{1}{\alpha_1(1-\alpha_2)} \right) V^{1-\alpha_2}(x(t_0), t_0)$, for any given initial condition $x(t_0)$.

Definition 2 [25]: Given constants $0 < {}^1r_{j,i} < {}^2r_{j,i}, i = 1, \dots, n$ and $j = 1, 2$, being the constants defining the boundaries of the compact subsets Ω_r , the set of switching functions is specified as below:

$$b_k(x_{k,i}) \triangleq \begin{cases} 1 & \text{if } |x_{k,i}| < {}^1r_{k,i} \\ \frac{2r_{k,i}^2 - x_{k,i}^2}{2r_{k,i}^2 - 1r_{k,i}^2} e^{\left(\frac{x_{k,i}^2 - 1r_{k,i}^2}{\varpi(2r_{k,i}^2 - 1r_{k,i}^2)} \right)^{2b}} & \text{if } {}^1r_{k,i} \leq |x_{k,i}| \leq {}^2r_{k,i} \\ 0 & \text{if } |x_{k,i}| > {}^2r_{k,i} \end{cases} \quad (8)$$

$$b_{j,i}(\bar{x}_j) \triangleq \prod_{k=1}^j b_k(x_{k,i}), \quad (9)$$

where $\bar{x}_1 = x_1^T \in R^n, \bar{x}_2 = [x_1^T, x_2^T]^T \in R^{2n}$, and $B_j(\bar{x}_j) = \text{diag}(b_{j,1}(\bar{x}_j), \dots, b_{j,n}(\bar{x}_j))$, with $\varpi > 0$ and $b \geq 1$.

4. GLOBAL NEURAL CONTROL OF ROBOT MANIPULATOR

The global adaptive neural control with finite-time (FT) convergence learning performance for robot manipulators is investigated in this section. During the controller design, the procedure breaks down into two steps.

4.1. Controller design

Step 1: The robot manipulator joint position error is defined as $\bar{x}_1 = x_1 - x_{1d}$, where $x_{1d} = q_d$. Taking the derivative of x_1 and using (2), we have:

$$\dot{\bar{x}}_1 = \dot{x}_1 - \dot{x}_{1d} = x_2 - \dot{x}_{1d}, \quad (10)$$

where $\dot{x}_{1d} = \dot{q}_d$.

Take x_2 as the virtual control of (10) and design the signal x_{2d} as:

$$x_{2d} = -K_{11}\bar{x}_1 - K_{12}\text{sign}(\bar{x}_1) + \dot{x}_{1d}, \quad (11)$$

where $K_{11} = \text{diag}(k_{11,1}, \dots, k_{11,n})$, and $k_{11,i} > 0, i = 1, \dots, n$, $K_{12} = \text{diag}(k_{12,1}, \dots, k_{12,n})$, and $k_{12,i} > 0, i = 1, \dots, n$.

Then define $\bar{x}_2 = x_2 - x_{2d}$ and (10) is calculated as:

$$\begin{aligned} \dot{\bar{x}}_1 &= x_2 - \dot{x}_{1d} \\ &= x_2 - x_{2d} + x_{2d} - \dot{x}_{1d} \\ &= \bar{x}_2 - K_{11}\bar{x}_1 - K_{12}\text{sign}(\bar{x}_1). \end{aligned} \quad (12)$$

Step 2: The robot manipulator joint velocity error is written as $\bar{x}_2 = x_2 - x_{2d}$. Taking the derivative of x_2 and using (2), we have:

$$M\dot{\bar{x}}_2 + C\bar{x}_2 = \tau - M\dot{x}_{2d} - Cx_{2d} - G. \quad (13)$$

The vector $M\dot{\bar{x}}_2$ in (13) is a function of the robot manipulator joint acceleration \ddot{q} , which is sensitive to measurement noise. To make control design independent of joint acceleration, inspired by [27], the Eq. (13) can be rewritten as:

$$\dot{F}_1(z) + F_2(z) = \tau + F_3(z), \quad (14)$$

where $F_1 = M\bar{x}_2, F_2 = -M\dot{\bar{x}}_2 + C\bar{x}_2$ and $F_3 = -M\dot{x}_{2d} - Cx_{2d} - G$. Using NNs to emulate the unknown functions F_1, F_2 and F_3 , respectively, we have:

$$\begin{aligned} F_1 &= M\bar{x}_2 = W_1^{*T} S_1(z) + \varepsilon_1, \\ F_2 &= -M\dot{\bar{x}}_2 + C\bar{x}_2 = W_2^{*T} S_2(z) + \varepsilon_2, \\ F_3 &= -M\dot{x}_{2d} - Cx_{2d} - G = W_3^{*T} S_3(z) + \varepsilon_3, \end{aligned} \quad (15)$$

where $z = [q, \dot{q}, x_{2d}, \dot{x}_{2d}]$, and W_1^{*T}, W_2^{*T} and W_3^{*T} are the optimal NNs weights matrix, S_1, S_2 and S_3 are the basis

function vectors, while ε_1 , ε_2 and ε_3 are the NNs construction error, and $\|\varepsilon_1\| < \varepsilon_1^*$, $\|\varepsilon_2\| < \varepsilon_2^*$, $\|\varepsilon_3\| < \varepsilon_3^*$.

Then, equation (15) can be further formulated as:

$$\begin{aligned} F_{1,i} &= S_1^T W_{1,i}^* + \varepsilon_{1,i}, \\ F_{2,i} &= S_2^T W_{2,i}^* + \varepsilon_{2,i}, \\ F_{3,i} &= S_3^T W_{3,i}^* + \varepsilon_{3,i}, \end{aligned} \quad (16)$$

where $i = 1, \dots, n$. $W_{1,i}^*$, $W_{2,i}^*$ and $W_{3,i}^*$ are i th column of the matrices W_1^* , W_2^* and W_3^* , respectively.

Consequently, using RBFNNs method, the Eq. (14) can be divided into n subsystems as:

$$\dot{S}_1^T W_{1,i}^* + \dot{\varepsilon}_{1,i} + S_2^T W_{2,i}^* + \varepsilon_{2,i} - S_3^T W_{3,i}^* - \varepsilon_{3,i} = \tau_i. \quad (17)$$

Define a new weight matrix as follows:

$$W_i^* = [W_{1,i}^{*T} W_{2,i}^{*T} W_{3,i}^{*T}]^T = \begin{bmatrix} W_{1,i}^* \\ W_{2,i}^* \\ W_{3,i}^* \end{bmatrix}. \quad (18)$$

Consequently, the Eq. (17) can be formulated as:

$$\bar{S}^T W_i^* + \bar{\varepsilon}_i = \tau_i, \quad (19)$$

where $\bar{S}^T = \dot{S}_1^T + \bar{S}_2^T - \bar{S}_3^T$ and $\dot{S}_1^T = [\dot{S}_1^T, \mathbf{0}_N^T, \mathbf{0}_N^T]^T$, $\bar{S}_2 = [\mathbf{0}_N^T, S_2^T, \mathbf{0}_N^T]^T$, $\bar{S}_3 = [\mathbf{0}_N^T, \mathbf{0}_N^T, S_3^T]^T$, $N_{\bar{S}} = N + N + N$, $\bar{\varepsilon}_i = \dot{\varepsilon}_{1,i} + \varepsilon_{2,i} - \varepsilon_{3,i}$.

We can design an adaptive controller as:

$$\begin{aligned} \tau_i &= -\bar{x}_{1,i} - k_{21,i} \bar{x}_{2,i} - k_{22,i} \text{sign}(\bar{x}_{2,i}) - b_{2,i}(\bar{x}_2) u_i^N \\ &\quad - (1 - b_{2,i}(\bar{x}_2)) u_i^R, \quad i = 1, \dots, n, \end{aligned} \quad (20)$$

$$u_i^N = \hat{W}_i^T \bar{S}_3(z), \quad (21)$$

$$u_i^R = F_{3,i}^U(z) \tanh\left(\frac{F_{3,i}^U(z)}{\omega_2}\right), \quad (22)$$

where $K_{21} = \text{diag}(k_{21,1}, \dots, k_{21,n})$, and $k_{21,i} > 0, i = 1, \dots, n$, $K_{22} = \text{diag}(k_{22,1}, \dots, k_{22,n})$, and $k_{22,i} > 0, i = 1, \dots, n$. $F_{3,i}^U(z)$ is upper bound of $F_{3,i}(z)$.

To facilitate weights estimation, let us first design the following filters:

$$\begin{cases} \rho \dot{\bar{S}}_{1f} + \bar{S}_{1f} = \bar{S}_1, & \bar{S}_{1f}|_{t=0} = \mathbf{0}_{N_{\bar{S}}}, \\ \rho \dot{\bar{S}}_{2f} + \bar{S}_{2f} = \bar{S}_2, & \bar{S}_{2f}|_{t=0} = \mathbf{0}_{N_{\bar{S}}}, \\ \rho \dot{\bar{S}}_{3f} + \bar{S}_{3f} = \bar{S}_3, & \bar{S}_{3f}|_{t=0} = \mathbf{0}_{N_{\bar{S}}}, \\ \rho \dot{\tau}_{if} + \tau_{if} = \tau_i, & \tau_{if}|_{t=0} = 0_n, \end{cases} \quad (23)$$

where \bar{S}_{1f} , \bar{S}_{2f} , \bar{S}_{3f} and τ_{if} are the filtered version of \bar{S}_1 , \bar{S}_2 , \bar{S}_3 and τ_i , respectively. According to (19) and (23), one can obtain:

$$W_i^{*T} \left(\frac{\bar{S}_1 - \bar{S}_{1f}}{\rho} + \bar{S}_{2f} - \bar{S}_{3f} \right) = W_i^{*T} \bar{S}_f = \tau_{if} - \bar{\varepsilon}_{if}. \quad (24)$$

Let us introduce matrices $P \in R^{N_{\bar{S}} \times N_{\bar{S}}}$, $Q_i \in R^{N_{\bar{S}}}$, which are defined as below:

$$\begin{cases} \dot{P} = -\ell P + \bar{S}_f \bar{S}_f^T, \\ \dot{Q}_i = -\ell Q_i + \bar{S}_f \tau_{if}, \end{cases} \quad (25)$$

where $\ell > 0$ is design parameter. The solution of (25) is derived as:

$$\begin{cases} P(t) = \int_0^t e^{-\ell_i(t-r)} \bar{S}_f \bar{S}_f^T dr, \\ Q_i(t) = \int_0^t e^{-\ell_i(t-r)} \bar{S}_f \tau_{if} dr, \end{cases} \quad (26)$$

Let us now define auxiliary vector $E_i \in R^N$ which can be calculated from P , Q_i :

$$\begin{aligned} E_i &= P \hat{W}_i - Q_i \\ &= P \hat{W}_i - P W_i^* - \psi_i \\ &= -P \tilde{W}_i - \psi_i, \end{aligned} \quad (27)$$

where $Q_i = P W_i^* + \psi_i$ with $\psi_i = \int_0^t e^{-\ell_i(t-r)} \bar{S}_f \bar{\varepsilon}_{if} dr$.

The closed-loop error equation becomes:

$$\begin{aligned} M \dot{\bar{x}}_2 + C \bar{x}_2 &= -\bar{x}_1 - K_{21} \bar{x}_2 - K_{22} \text{sign}(\bar{x}_2) \\ &\quad + B_2(\bar{x}_2) (\bar{F}_3 + \varepsilon_3) \\ &\quad + (I - B_2(\bar{x}_2)) (F_3 - u^R), \end{aligned} \quad (28)$$

where $\bar{F}_{3,i} = \tilde{W}_{3,i}^T S_3(z) = \tilde{W}_i^T \bar{S}_3(z)$, $\tilde{W}_{3,i} = W_{3,i}^* - \hat{W}_{3,i}$, $\tilde{W}_i = W_i^* - \hat{W}_i$.

The adaptation laws of the estimated parameters are designed as:

$$\dot{\hat{W}}_i = \Gamma \left(\bar{S}_3 \bar{x}_{2,i} b_{2,i}(\bar{x}_2) - \delta_i \frac{P^T E_i}{\|E_i\|} \right), \quad i = 1, \dots, n, \quad (29)$$

where Γ is a symmetric positive definite matrix, δ_i is designed positive parameter.

4.2. Stability analysis

Consider system (1), with control laws (20), and adaptive laws (29) under **Assumptions 1** and **2**. Let us choose a suitable Lyapunov function as below:

$$V = V_1 + V_2, \quad (30)$$

with

$$V_1 = \frac{1}{2} \bar{x}_1^T \bar{x}_1, \quad (31)$$

$$V_2 = \frac{1}{2} \bar{x}_2^T M \bar{x}_2 + \frac{1}{2} \sum_{i=1}^n (E_i^T P^{-1} \Gamma^{-1} P^{-1} E_i), \quad (32)$$

where Γ^{-1} is a positive-definite matrix.

Taking the derivative of V_1 , we have:

$$\begin{aligned} \dot{V}_1 &= \bar{x}_1^T \dot{\bar{x}}_1 \\ &= \bar{x}_1^T (\bar{x}_2 - K_{11} \bar{x}_1 - K_{12} \text{sign}(\bar{x}_1)) \\ &= -\bar{x}_1^T K_{11} \bar{x}_1 - \sum_{i=1}^n (k_{12,i} |\bar{x}_{1,i}|) + \bar{x}_1^T \bar{x}_2 \\ &\leq -\sum_{i=1}^n (k_{12,i} |\bar{x}_{1,i}|) + \bar{x}_1^T \bar{x}_2 \\ &\leq -K_1^* \sqrt{V_1} + \bar{x}_1^T \bar{x}_2, \end{aligned} \quad (33)$$

where $K_1^* = \sqrt{2} \lambda_{\min}(K_{12})$.

According to (27), we have:

$$\begin{aligned}
\frac{\partial(P^{-1}E_i)}{\partial t} &= -\frac{\partial(\tilde{W}_i + P^{-1}\psi_i)}{\partial t} \\
&= -\dot{\tilde{W}}_i + P^{-1}\dot{P}P^{-1}\psi_i - P^{-1}\dot{\psi}_i \\
&= -\dot{\tilde{W}}_i + \psi'_i \\
&= \dot{W}_i + \psi'_i,
\end{aligned} \tag{34}$$

where $\psi'_i = P^{-1}\dot{P}P^{-1}\psi_i - P^{-1}\dot{\psi}_i$.

Taking the derivative of V_2 yields:

$$\begin{aligned}
\dot{V}_2 &= \tilde{x}_2^T M \dot{\tilde{x}}_2 + \frac{1}{2} \tilde{x}_2^T \dot{M} \tilde{x}_2 \\
&\quad + \sum_{i=1}^n \left(E_i^T P^{-1} \Gamma^{-1} \left(\dot{W}_i + \psi'_i \right) \right) \\
&= \frac{1}{2} \tilde{x}_2^T \dot{M} \tilde{x}_2 - \tilde{x}_2^T C \tilde{x}_2 - \tilde{x}_2^T \tilde{x}_1 - \tilde{x}_2^T K_{21} \tilde{x}_2 \\
&\quad - \sum_{i=1}^n (k_{22,i} |\tilde{x}_{2,i}|) + \tilde{x}_2^T B_2(\tilde{x}_2) (\tilde{F}_3 + \varepsilon_3) \\
&\quad + \tilde{x}_2^T (I - B_2(\tilde{x}_2)) (F_3 - u^R) \\
&\quad + \sum_{i=1}^n \left(E_i^T P^{-1} \Gamma^{-1} \dot{W}_i \right) \\
&\quad + \sum_{i=1}^n \left(E_i^T P^{-1} \Gamma^{-1} \psi'_i \right).
\end{aligned} \tag{35}$$

Substituting the adaptation laws (29) into (35), we have:

$$\begin{aligned}
\dot{V}_2 &= -\tilde{x}_2^T \tilde{x}_1 - \tilde{x}_2^T K_{21} \tilde{x}_2 - \sum_{i=1}^n (k_{22,i} |\tilde{x}_{2,i}|) \\
&\quad + \tilde{x}_2^T B_2(\tilde{x}_2) \varepsilon_3 + \tilde{x}_2^T (I - B_2(\tilde{x}_2)) (F_3 - u^R) \\
&\quad + \sum_{i=1}^n (-\psi_i^T P^{-1} \bar{S}_3 \tilde{x}_{2,i} B_{2,i}(\tilde{x}_2)) \\
&\quad + \sum_{i=1}^n \left(E_i^T P^{-1} \Gamma^{-1} \psi'_i - \delta_i \frac{E_i^T P^{-1} P^T E_i}{\|E_i\|} \right).
\end{aligned} \tag{36}$$

The following inequalities hold:

$$\begin{aligned}
\tilde{x}_2^T B_2(\tilde{x}_2) \varepsilon_3 &\leq \sum_{i=1}^n (\varepsilon_{3,i}^* |\tilde{x}_{2,i}|), \\
F_{3,i} - u_{2,i}^R &\leq |F_{3,i}| - F_{3,i}^U \tanh \left(\frac{F_{3,i}^U}{\omega_2} \right) \leq \kappa \omega_2.
\end{aligned} \tag{37}$$

Using the Young inequality, we have:

$$\begin{aligned}
\dot{V}_2 &\leq -\tilde{x}_2^T \tilde{x}_1 - \tilde{x}_2^T K_{21} \tilde{x}_2 - \sum_{i=1}^n (k_{22,i} |\tilde{x}_{2,i}|) \\
&\quad + \sum_{i=1}^n (\varepsilon_{3,i}^* |\tilde{x}_{2,i}|) + \sum_{i=1}^n (\kappa \omega_2 |\tilde{x}_{2,i}|) \\
&\quad - \sum_{i=1}^n (|\tilde{x}_{2,i}| \|\psi_i^T P^{-1} \bar{S}_3\|) \\
&\quad - \sum_{i=1}^n (\|E_i^T\| (\delta_i - \|P^{-1} \Gamma^{-1} \psi'_i\|)) \\
&\leq -\sum_{i=1}^n (|\tilde{x}_{2,i}| (k_{22,i} - \varepsilon_{3,i}^* - \kappa \omega_2 + \|\psi_i^T P^{-1} \bar{S}_3\|))
\end{aligned} \tag{38}$$

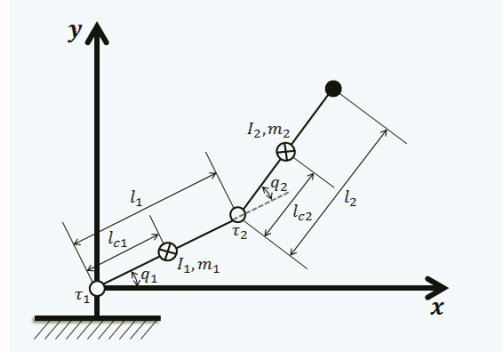


Fig. 1. Illustration of the 2DOF robot manipulator.

$$\begin{aligned}
& - \sum_{i=1}^n (\|E_i^T\| (\delta_i - \|P^{-1} \Gamma^{-1} \psi'_i\|)) - \tilde{x}_2^T \tilde{x}_1 \\
& \leq -K_2^* \sqrt{V_2} - \tilde{x}_1^T \tilde{x}_2,
\end{aligned}$$

where $K_2^* = \min[(k_{22,i} - \varepsilon_{3,i}^* - \kappa \omega_2 + \|\psi_i^T P^{-1} \bar{S}_3\|) \times \sqrt{2/\lambda_{\max}(M)}, (\delta_i - \|P^{-1} \Gamma^{-1} \psi'_i\|) \delta_p \sqrt{\lambda_{\max}(\Gamma^{-1})}]$.

$$\dot{V} = \dot{V}_1 + \dot{V}_2 \leq -K^* \sqrt{V}, \tag{39}$$

where $K^* = \min[K_1^*, K_2^*]$.

Note that the inequation (39) satisfies the condition of Lemma 2. Therefore, the error terms \tilde{x}_1 , \tilde{x}_2 and E_i , $i = 1, \dots, n$, converge to zero in finite time. Moreover, the parameter error \tilde{W} converges to a compact set in finite time satisfying $\lim_{t \rightarrow \infty} P \tilde{W}_i = -\psi_i$. Then, $V \equiv 0$, $\forall t > t_c$ with the finite-time

$$t_c \leq 2K^* \sqrt{V(0)}. \tag{40}$$

The tracking errors \tilde{x}_1 and \tilde{x}_2 vanish to zeros in finite time, so that the tracking error \tilde{x}_1 , \tilde{x}_2 to zero is guaranteed.

Remark 1: According to [33] [34], the dissipativity and l_2 - l_∞ approaches can be incorporated into the Lyapunov function to ensure the robustness.

5. SIMULATIONS STUDIES

Contrast simulation studies have been carried out on a model of 2DOF robot manipulator to analyse the effectiveness of the controller we developed above.

The dynamics of 2DOF robot manipulator is described as:

$$\begin{bmatrix} M_{11} & M_{12} \\ M_{21} & M_{22} \end{bmatrix} \ddot{q} + \begin{bmatrix} V_{11} & V_{12} \\ V_{21} & V_{22} \end{bmatrix} \dot{q} + \begin{bmatrix} G_1 \\ G_2 \end{bmatrix} = \tau, \tag{41}$$

where $m_1 = 2$ kg, $m_2 = 0.85$ kg, $l_1 = 0.35$ m, $l_2 = 0.31$ m, $I_1 = 0.061$ kgm² and $I_2 = 0.020$ kgm². The m_i is the inertia of link i , I_i is the inertia of link i around the axis at the mass center of link i , l_i and l_{ci} are the length of link i and the distance between $i - 1$ th joint and the i th joint's mass center, $i = 1, 2$, respectively.

Table 1. The description of 2-joint robot manipulator.

M_{11}	$m_1 l_{c1}^2 + m_2(l_1^2 + l_{c2}^2 + 2l_1 l_{c2} \cos q_2) + I_1 + I_2$
M_{12}	$m_2(l_{c2}^2 + l_1 l_{c2} \cos q_2) + I_2$
M_{21}	$m_2(l_{c2}^2 + l_1 l_{c2} \cos q_2) + I_2$
M_{22}	$m_2 l_{c2}^2 + I_2$
V_{11}	$-m_2 l_1 l_{c2} \dot{q}_2 \sin q_2$
V_{12}	$-m_2 l_1 l_{c2} (\dot{q}_1 + \dot{q}_2) \sin q_2$
V_{21}	$m_2 l_1 l_{c1} \dot{q}_1 \sin q_2$
V_{22}	0
G_1	$(m_1 l_{c2} + m_2 l_1) g \cos q_1 + m_2 l_{c2} g \cos(q_1 + q_2)$
G_2	$m_2 l_{c2} g \cos(q_1 + q_2)$

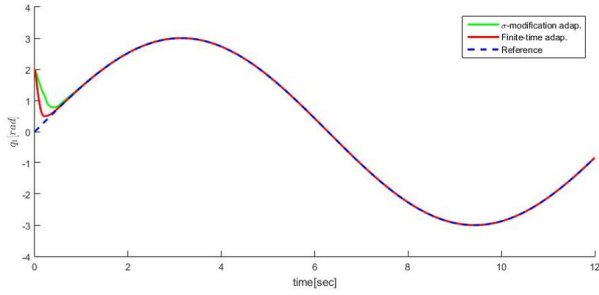


Fig. 2. Tracking performance of q_1 .

The desired trajectories are given as $q_{d1} = 3 \sin 0.5t$ and $q_{d2} = 2 \cos 0.5t$, where $t \in [0, t_f]$, and $t_f = 15s$. The control gains are selected as $K_{11} = \text{diag}(10, 10)$, $K_{12} = \text{diag}(0.0001, 0.0001)$, $K_{21} = \text{diag}(10, 10)$, $K_{22} = \text{diag}(0.0001, 0.0001)$. And the NNs adaptive laws are chosen as $\Gamma_F = 15I$, $\Gamma_H = 15I$, $\delta_F = 0.005$, $\delta_H = 0.005$. The number of hidden layer nodes of the NNs is set as $N_1 = N_2 = N_3 = 256$. The NNs weight matrix are initialized as $\hat{W}_1(0) = \mathbf{0} \in R^{768}$, $\hat{W}_2(0) = \mathbf{0} \in R^{768}$. The robust parameters are set as $\omega_2 = 0.01$, while ${}^1r_{1,1} = {}^1r_{1,2} = {}^1r_{2,1} = {}^1r_{2,2} = 2$ and ${}^2r_{1,1} = {}^2r_{1,2} = {}^2r_{2,1} = {}^2r_{2,2} = 3$, and $\varpi = 1$ and $b = 1$. In the comparative simulation studies, the σ -modification adaptive laws is given as:

$$\dot{\hat{W}}_i = \Gamma (\bar{S}_3 \tilde{x}_{2,i} b_{2,i}(\tilde{x}_2) - \sigma_i \hat{W}_i). \quad (42)$$

The simulation results are presented in Figs. 2-9.

Figs. 2-5 show that the reference signal q_d and \dot{q}_d can be tracked in finite time. As it can be seen, all adaptation laws could lead to stable control performance. However, comparing with the conventional adaptive law, the global adaptive neural control with FT learning adaptive laws (30) achieve faster convergence speed of the tracking errors. It may be due to the employment of the derived weights error information E_i for the adaptive law.

Therefore, the proposed global adaptive neural controller for robot manipulators is able to achieve good transient tracking performance of tracking errors in the presence of unknown dynamics.

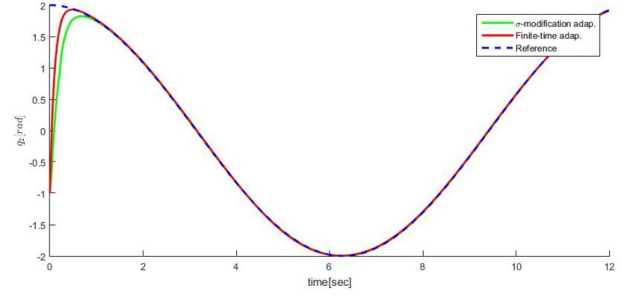


Fig. 3. Tracking performance of q_2 .

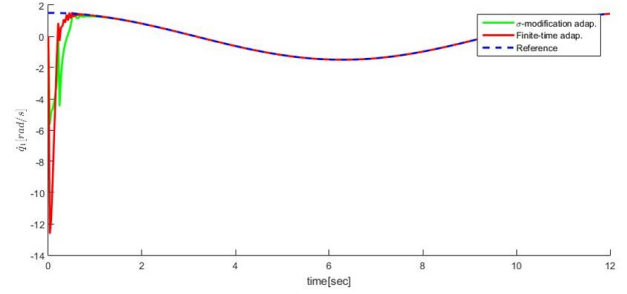


Fig. 4. Tracking performance of \dot{q}_1 .

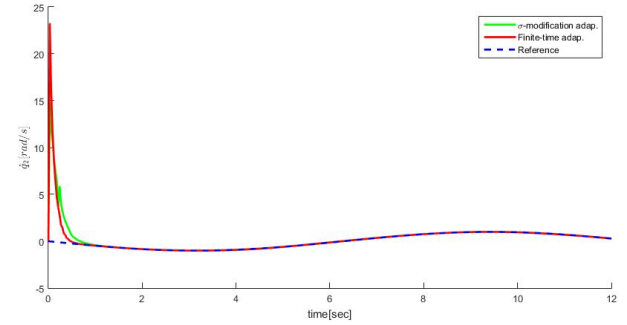


Fig. 5. Tracking performance of \dot{q}_2 .

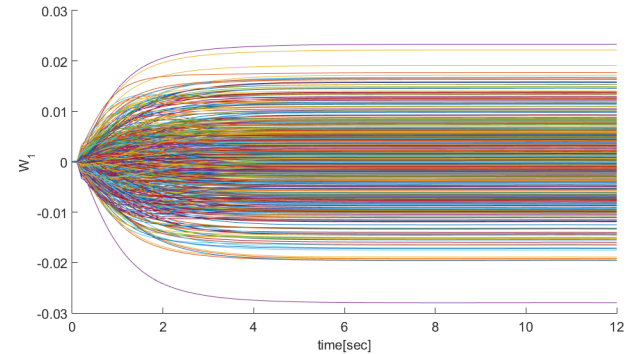


Fig. 6. FT weights update for the 1st joint.

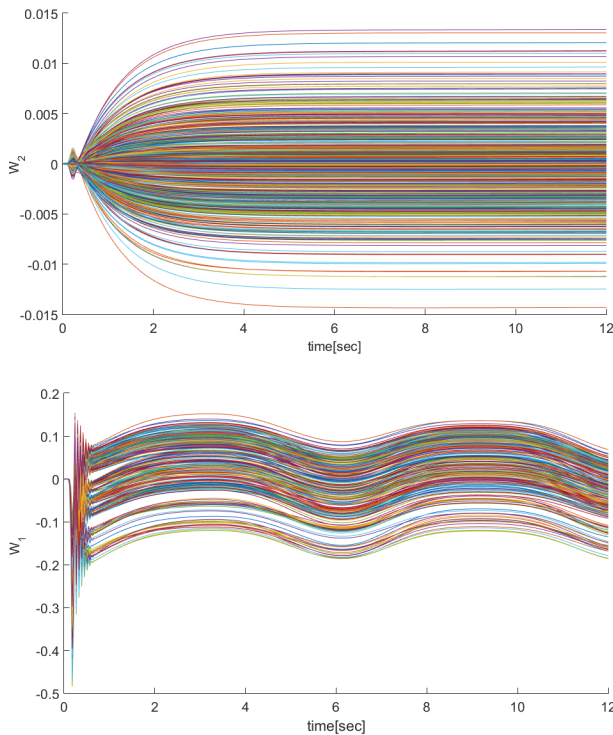


Fig. 8. Conventional weights update for the 1st joint.

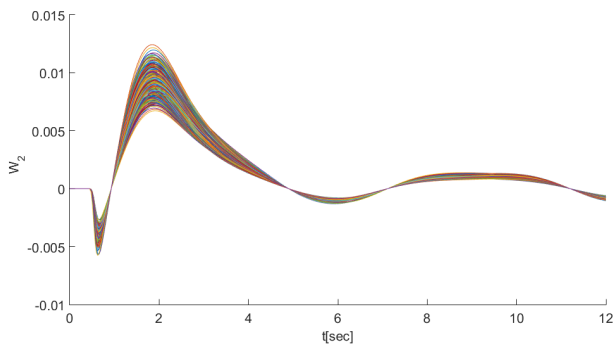


Fig. 9. Conventional weights update for the 2nd joint.

Figs. 6-7 show the weights converge to the optimal value in finite time. In comparison to the results shown in Figs. 8-9, the FT adaptive learning algorithm ensures that the adaptation of weights estimation converges to the optimal value in a prescribed time horizon, such that the learning weights can be reused for repeated task, and thus could reduce computational load, improve transient performance and enhance robustness.

6. CONCLUSIONS

In this work, a smooth switching algorithm has been employed by which adaptive neural controller and robust controller cooperate to ensure closed-loop system global

stability as rigorously established by the Lyapunov approach. The FT adaptive learning algorithms are employed to guarantee that the estimated weights converge to optimal values in finite time. The optimal weights obtained through learning process of NNs could be reused next time for a repeated task, such that neural learning could be spared and thus transient control performance and robustness could be improved. In future work, we will extend the proposed scheme to more general nonlinear systems to test the performance of the proposed control method for more complex systems such as hypersonic flight vehicles [35–37].

REFERENCES

- [1] R. Cui, X. Zhang, and D. Cui, “Adaptive sliding-mode attitude control for autonomous underwater vehicles with input nonlinearities,” *Ocean Engineering*, vol. 123, pp. 45–54, 2016. [click]
- [2] C. Yang, Z. Li, R. Cui, and B. Xu, “Neural network-based motion control of an underactuated wheeled inverted pendulum model,” *IEEE Transactions on Neural Networks & Learning Systems*, vol. 25, no. 11, pp. 2004–2016, 2014. [click]
- [3] H. Li and W. Yan, “Model predictive stabilization of constrained underactuated autonomous underwater vehicles with guaranteed feasibility and stability,” *IEEE/ASME Transactions on Mechatronics*, vol. 22, no. 3, pp. 1185–1194, 2017.
- [4] H. Li, P. Xie, and W. Yan, “Receding horizon formation tracking control of constrained underactuated autonomous underwater vehicles,” *IEEE Transactions on Industrial Electronics*, vol. 64, no. 6, pp. 5004–5013, 2017.
- [5] Q. Zhou, H. Li, C. Wu, L. Wang, and C. K. Ahn, “Adaptive fuzzy control of nonlinear systems with unmodeled dynamics and input saturation using small-gain approach,” *IEEE Transactions on Systems Man & Cybernetics Systems*, vol. PP, no. 99, pp. 1–11, 2016.
- [6] C. K. Ahn, P. Shi, and L. Wu, “Receding horizon stabilization and disturbance attenuation for neural networks with time-varying delay,” *IEEE Transactions on Cybernetics*, vol. 45, no. 12, pp. 2680–2692, 2014.
- [7] W. He, Y. Chen, and Z. Yin, “Adaptive neural network control of an uncertain robot with full-state constraints,” *IEEE Transactions on Cybernetics*, vol. 46, no. 3, pp. 620–629, 2016. [click]
- [8] W. He, A. O. David, Z. Yin, and C. Sun, “Neural network control of a robotic manipulator with input deadzone and output constraint,” *IEEE Transactions on Systems Man & Cybernetics Systems*, vol. 46, no. 6, pp. 759–770, 2016. [click]
- [9] W. He, Z. Yin, and C. Sun, “Adaptive neural network control of a marine vessel with constraints using the asymmetric barrier lyapunov function,” *IEEE Transactions on Cybernetics*, vol. 47, no. 3, pp. 1641–1651, 2017.

- [10] L. Cheng, Z. G. Hou, and M. Tan, "Adaptive neural network tracking control for manipulators with uncertain kinematics, dynamics and actuator model," *Automatica*, vol. 45, no. 10, pp. 2312-2318, 2009. [click]
- [11] F. Sun, Z. Sun, and P. Y. Woo, "Neural network-based adaptive controller design of robotic manipulators with an observer," *IEEE Transactions on Neural Networks*, vol. 12, no. 1, pp. 54-67, 2001. [click]
- [12] F. C. Sun, Z. Q. Sun, R. J. Zhang, and Y. B. Chen, "Neural adaptive tracking controller for robot manipulators with unknown dynamics," *IEE Proceedings - Control Theory and Applications*, vol. 147, no. 3, pp. 366-370, 2000. [click]
- [13] C. Yang, Y. Jiang, Z. Li, W. He, and C.-Y. Su, "Neural control of bimanual robots with global stability and motion precision.," *IEEE Transactions on Industrial Informatics*, DOI: 10.1109/TII.2016.2612646.
- [14] D. Bu, W. Sun, H. Yu, C. Wang, and H. Zhang, "Adaptive robust control based on rbf neural networks for duct cleaning robot," *International Journal of Control, Automation and Systems*, vol. 13, no. 2, pp. 475-487, 2015. [click]
- [15] R. M. Sanner and J. E. Slotine, "Gaussian networks for direct adaptive control," *IEEE Transactions on Neural Networks*, vol. 3, no. 6, pp. 837-863, 1992. [click]
- [16] H. B. Li, F. C. Sun, Z. Q. Sun, and J. Du, "Optimal state feedback integral control using network-based measurements," *IEEE Transactions on Instrumentation & Measurement*, vol. 61, no. 12, pp. 3127-3135, 2012. [click]
- [17] J. Na, Q. Chen, X. Ren, and Y. Guo, "Adaptive prescribed performance motion control of servo mechanisms with friction compensation," *IEEE Transactions on Industrial Electronics*, vol. 61, no. 1, pp. 486-494, 2014. [click]
- [18] S. J. Chang, J. Y. Lee, B. P. Jin, and Y. H. Choi, "An online fault tolerant actor-critic neuro-control for a class of nonlinear systems using neural network hjb approach," *International Journal of Control, Automation and Systems*, vol. 13, no. 2, pp. 311-318, 2015. [click]
- [19] F. C. Sun, Z. Sun, and P. Y. Woo, "Stable neural-network-based adaptive control for sampled-data nonlinear systems," *IEEE Transactions on Neural networks*, vol. 9, no. 5, pp. 956-968, 1998. [click]
- [20] L. Cheng, Z. G. Hou, M. Tan, and W. J. Zhang, "Tracking control of a closed-chain five-bar robot with two degrees of freedom by integration of an approximation-based approach and mechanical design.," *IEEE Transactions on Systems, Man, and Cybernetics, Part B*, vol. 42, no. 5, pp. 1470-1479, 2012.
- [21] L. Cheng, Z. G. Hou, M. Tan, Y. Lin, and W. Zhang, "Neural-network-based adaptive leader-following control for multiagent systems with uncertainties," *IEEE Transactions on Neural Networks*, vol. 21, no. 8, pp. 1351-1358, 2010. [click]
- [22] L. Cheng, Z. G. Hou, Y. Lin, M. Tan, W. C. Zhang, and F. X. Wu, "Recurrent neural network for non-smooth convex optimization problems with application to the identification of genetic regulatory networks," *IEEE Transactions on Neural Networks*, vol. 22, no. 5, pp. 714-726, 2011. [click]
- [23] M. Chen, P. Shi, and C. C. Lim, "Adaptive neural fault-tolerant control of a 3-dof model helicopter system," *IEEE Transactions on Systems Man & Cybernetics Systems*, vol. 46, no. 2, pp. 260-270, 2015. [click]
- [24] T. Teng, C. Yang, B. Xu, and Z. Li, "Neural network based global adaptive dynamic surface tracking control for robot manipulators," *Proc. of IEEE International Conference on Advanced Robotics and Mechatronics (ICARM)*, pp. 20-25, IEEE, 18-20 Aug, 2016, Macau, China.
- [25] B. Xu, C. Yang, and Y. Pan, "Global neural dynamic surface tracking control of strict-feedback systems with application to hypersonic flight vehicle," *IEEE Transactions on Neural Networks and Learning Systems*, vol. 26, no. 10, pp. 2563-2575, 2015. [click]
- [26] J.-T. Huang, "Global tracking control of strict-feedback systems using neural networks," *IEEE Transactions on Neural Networks and Learning Systems*, vol. 23, no. 11, pp. 1714-1725, 2012. [click]
- [27] J. Na, M. N. Mahyuddin, G. Herrmann, X. Ren, and P. Barber, "Robust adaptive finite-time parameter estimation and control for robotic systems," *International Journal of Robust & Nonlinear Control*, vol. 25, no. 16, pp. 3045-3071, 2014. [click]
- [28] J. Na, X. Ren, and Y. Xia, "Adaptive parameter identification of linear siso systems with unknown time-delay," *Systems & Control Letters*, vol. 66, no. 1, pp. 43-50, 2014. [click]
- [29] C. Wang and D. J. Hill, "Learning from neural control," *IEEE Transactions on Neural Networks*, vol. 17, no. 1, pp. 130-146, 2006. [click]
- [30] C. Yang, X. Wang, Z. Li, Y. Li, and C.-Y. Su, "Teleoperation control based on combination of wave variable and neural networks.," *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, DOI: 10.1109/TSMC.2016.2615061.
- [31] C. Yang, X. Wang, L. Cheng, and H. Ma, "Neural-learning based telerobot control with guaranteed performance.," *IEEE Transactions on Cybernetics*, DOI: 10.1109/TCYB.2016.2573837.
- [32] J.-J. Slotine and W. Li, "Adaptive manipulator control a case study," in *Proc. of IEEE International Conference on Robotics and Automation. Proceedings*, 1987.
- [33] C. K. Ahn, L. Wu, and P. Shi, "Stochastic stability analysis for 2-d roesser systems with multiplicative noise," *Automatica*, vol. 69, pp. 356-363, 2016. [click]
- [34] C. K. Ahn, P. Shi, and M. V. Basin, "Two-dimensional dissipative control and filtering for roesser model," *IEEE Transactions on Automatic Control*, vol. 60, no. 7, pp. 1745-1759, 2015. [click]
- [35] B. Xu, Q. Zhang, and Y. Pan, "Neural network based dynamic surface control of hypersonic flight dynamics using small-gain theorem," *Neurocomputing*, vol. 173, no. P3, pp. 690-699, 2015. [click]
- [36] B. Xu, S. Wang, D. Gao, Y. Zhang, and Z. Shi, "Command filter based robust nonlinear control of hypersonic aircraft with magnitude constraints on states and actuators," *Journal of Intelligent & Robotic Systems*, vol. 73, no. 1-4, pp. 233-247, 2014. [click]

- [37] B. Xu, "Disturbance observer based dynamic surface control of transport aircraft with continuous heavy cargo air-drop," *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, vol. 47, no. 1, pp. 161-170, 2017.



Chenguang Yang received the B.Eng. degree in measurement and control from Northwestern Polytechnical University, Xi'an, China, in 2005, and the Ph.D. degree in control engineering from the National University of Singapore, Singapore, in 2010. He received postdoctoral training at Imperial College London, UK. He is a senior lecturer with Zienkiewicz Centre

for Computational Engineering, Swansea University, UK. He is also with South China University of Technology, China. His research interests lie in robotics, automation and computational intelligence.



Tao Teng received the B.Eng. degree in automation from the South China University of Technology, Guangzhou, China, in 2016, and is currently pursuing the M.S. degree in the South China University of Technology, Guangzhou, China. His research interests include human-robot interaction, robotics and intelligent control.



Bin Xu received the B.S. degree in measurement and control from Northwestern Polytechnical University, China, 2006 and the Ph.D. degree in Computer Science from Tsinghua University, China, 2012. He visited ETH Zurich from Mar 2010 to Mar 2011 and from Feb 2012 to Jan 2013 he was Research Fellow with Nanyang Technological University. He is currently


professor with School of Automation, Northwestern Polytechnical University. His research interests include intelligent control and adaptive control with application to flight dynamics.



Zhijun Li received the Ph.D. degree in mechatronics, Shanghai Jiao Tong University, P. R. China, in 2002. From 2003 to 2005, he was a postdoctoral fellow in Department of Mechanical Engineering and Intelligent systems, The University of Electro-Communications, Tokyo, Japan. From 2005 to 2006, he was a research fellow in the Department of Electrical and Computer Engineering, National University of Singapore, and Nanyang Technological University, Singapore. From 2007-2011, he was an Associate Professor in the Department of Automation, Shanghai Jiao Tong University, P. R. China. In 2008, he was a visiting scholar in Microsoft Research Asia, Beijing. Since 2012, he is a Professor in College of Automation


Science and Engineering, South China university of Technology, Guangzhou, China. In 2015, he is a visiting professor in Faculty Science and Technology, the University of Macau, Macau, China, and Department of Advanced Robotics, Italian Institute of Technology' Genoa Italy. From 2016, he is the Chair of Technical Committee on Biomechanics and Biorobotics Systems (B2S), IEEE Systems, Man and Cybernetics Society. He is serving as an Editor-at-large of Journal of Intelligent & Robotic Systems, Associate Editors of IEEE Transactions on Neural Networks and Learning Systems and IEEE Transactions on Systems, Man and Cybernetics: Systems, and IEEE Transactions on Automation Science and Engineering. He has been the General Chair of 2016 IEEE Conference on Advanced Robotics and Mechatronics, Macau, China. Dr. Li's current research interests include service robotics, tele-operation systems, nonlinear control, neural network optimization, etc.

Jing Na received the B.S. and Ph.D. degrees from the School of Automation, Beijing Institute of Technology, Beijing, China, in 2004 and 2010, respectively. Since 2010, he has been with the Faculty of Mechanical and Electrical Engineering, Kunming University of Science and Technology, Kunming, China, where he was promoted to be a Professor in 2013. He is currently a Marie Curie Intra-European Fellow, hosted at the Department of Mechanical Engineering, University of Bristol, UK. From 2011 to 2013, he was a Postdoctoral Fellow with the ITER Organization, Cadarache, France. He was a Visiting Student in the Universitat Politècnica de Catalunya (UPC), Spain, in 2008 and a joint-training PhD student in the University of Bristol, UK in 2009. His current research interests include intelligent control, adaptive parameter estimation, adaptive optimal control, neural networks and nonlinear control with particular applications to robotics, servomechanisms, automotive engines, powertrain and vehicle suspension systems.



Chun-Yi Su received the Ph.D. degree in control engineering from the South China University of Technology, Guangzhou, China, in 1990. He joined Concordia University, Montreal, QC, Canada, in 1998, after a seven-year stint with the University of Victoria, Victoria, BC, Canada. He is currently with the College of Automation Science and Engineering, South China

University of Technology, on leave from Concordia University. His current research interests include the application of automatic control theory to mechanical systems. He is particularly interested in control of systems involving hysteresis nonlinearities. He has authored or co-authored over 300 publications in journals, book chapters, and conference proceedings. Dr. Su has served as an Associate Editor of the IEEE TRANSACTIONS ON AUTOMATIC CONTROL, the IEEE TRANSACTIONS ON CONTROL SYSTEMS TECHNOLOGY, and the Journal of Control Theory and Applications. He has been on the Editorial Board of 18 journals, including the IFAC Journal of Control Engineering Practice and Mechatronics.



University of Technology, on leave from Concordia University. His current research interests include the application of automatic control theory to mechanical systems. He is particularly interested in control of systems involving hysteresis nonlinearities. He has authored or co-authored over 300 publications in journals, book chapters, and conference proceedings. Dr. Su has served as an Associate Editor of the IEEE TRANSACTIONS ON AUTOMATIC CONTROL, the IEEE TRANSACTIONS ON CONTROL SYSTEMS TECHNOLOGY, and the Journal of Control Theory and Applications. He has been on the Editorial Board of 18 journals, including the IFAC Journal of Control Engineering Practice and Mechatronics.

University of Technology, on leave from Concordia University. His current research interests include the application of automatic control theory to mechanical systems. He is particularly interested in control of systems involving hysteresis nonlinearities. He has authored or co-authored over 300 publications in journals, book chapters, and conference proceedings. Dr. Su has served as an Associate Editor of the IEEE TRANSACTIONS ON AUTOMATIC CONTROL, the IEEE TRANSACTIONS ON CONTROL SYSTEMS TECHNOLOGY, and the Journal of Control Theory and Applications. He has been on the Editorial Board of 18 journals, including the IFAC Journal of Control Engineering Practice and Mechatronics.